




Environmental projector enclosures are custom designed to protect your projector from weather and thieves/vandals in outdoor environments. They feature tough aluminum construction and easy projector access. All units are customized for the intended projector & lens – must specify make & model.

- Protect projectors in outdoor applications
  - for environments 0° to +100° F
- Sealed, weatherproof steel construction
- Vandal/theft resistant
- Integrated cooling and heating
- Projector alignment mount integrated within the enclosure
- Hinged door / access panels for projector access
- Locking glide system for easy projector access
- Dual pane window: 99.7% optically clear glass
- Mounting channels provide top rigging points
- Specify white or black powder coat finish

FEATURES & BENEFITS

## Specifications

- Approximate Dimensions: 21.88"h x 36"w x 80.03"d, 325 lbs.
- Max size projector + lens: 9.9"h x 22.9"w x 30.8"d, max heat dissipation: 6,000 BTU
- RS232 I/O port/Ethernet port for remote monitoring/control
- Digital control unit with programmable temperature points for AC On/Off, Overheat Alarm, Overload with power shutoff
- Integrated air conditioner
- Heating sub-system with circulation fans (optional)
- Custom designed for your specific projector
- 1 year warranty

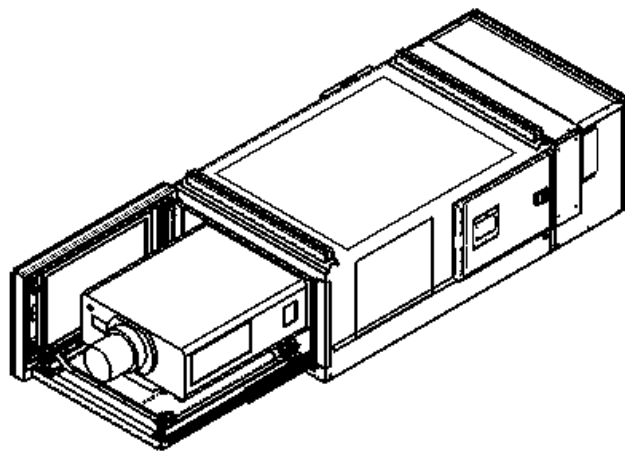

Custom units are built to order based on your projector size.  
Please inquire for dimensional information.